



Features and Benefits

- Effective solution for high media temperatures
- Easy mounting

Technical Overview

The PL-HS heat sink enables the PL-528 & PL-525 sensors to be used on systems where the medium has a higher temperature than the sensor allows.

The cooling fins effectively transfer the heat, depending on the ambient temperature. Systems with a medium temperature of more than 80°C or 125°C can be monitored without harming the sensor.

Product Codes

PL-HS Static pressure sensor heat sink

Specification


Material	Stainless steel 1.4305 / AISI 303
Pressure connections:	
System	½" BSP male
Sensor	½" BSB female
Media	Liquids and gases
Pressure	40bar max.
Dimensions	123 x 30mm
Country of origin	Switzerland

WEEE Directive:



At the end of the products useful life please dispose as per the local regulations. Do not dispose of with normal household waste. Do not burn.

Temperature Chart & Dimensions

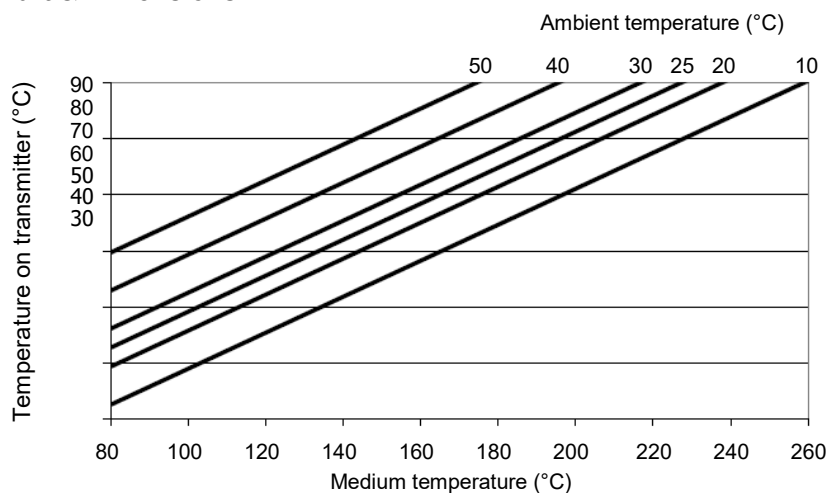

Whilst every effort has been made to ensure the accuracy of this specification, Sontay cannot accept responsibility for damage, injury, loss or expense resulting from errors or omissions. In the interest of technical improvement, this specification may be altered without notice.